



ST5100-KS-MY

LYONN UPS 10-40 Kva

- » Multi-funtional touch screen
- » Adjustable Input and Output Configuration
- » AC/AC Efficiency up to 96%
- » Output power factor 1.0
- » 4 Units Parallel
- » Compact footprint with integrated autonomy
- » Integrated with input,output,bypass, maintenance bypass and battery breaker



Finance



Telecommunication



DataCenter



Government



Manufacturing



Healthcare



Transportation




Comercial Buildings



High Reliability

- Super wide input voltage range -60%~+25% for high grid adaptability and prolong battery service life.
- Dual DSP control for top performance and reliability.
- Intelligent fan speed control reduces the noise and prolongs fan service life.
- Anti-corrosion resistant coating in all PCB boards.
- Full protection with input, output, bypass, maintenance bypass and battery breaker.
- Generator compatible ensure the clean power for extend power outage.
- Local and remote EPO function for immediatly remove power from connected load in the event of emergency.
- Short circuit time settable 10-200ms which provide high protection for system.
- Bus synchronization control function provides reliable high power for the dual bus application.

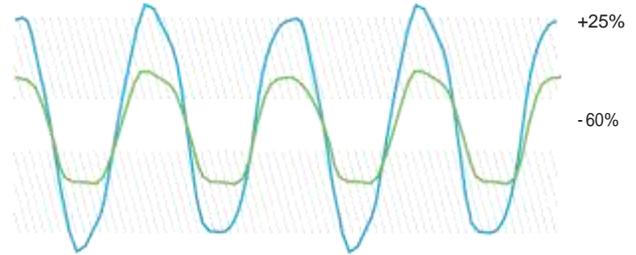

wide input voltage range




Automatic fans control




Green Power

- Output power factor 1.0, more powerful to connect more critical loads.
- AC/AC efficiency up to 96% and 25% load above 94% efficiency reduces heat dissipation and limits power consumption costs.
- ECO mode efficiency up to 99% will significant reduce the TCO.
- 3 level inverter and IGBT technology ensure input PF>0.99 and low THDi <3% for maximum upstream sources compatibility.
- Self-load test function, easy debugging and easy onsite test during commissioning, before it is connected the real load, without using costly temporary loads, cabling and breakers for energy saving.

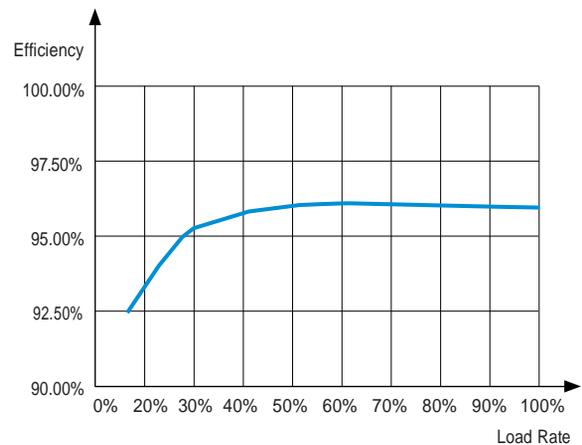

Galvanic isolation

- Isolation transformer can house inside the cabinet for full input or output isolation which suitable for medical and critical application.
- Isolation transformer temperature detection and alarm.
- Short circuit protection, restrain the high current puncture to UPS.
- No effects to the UPS output performance or reduced impact of the inverter power components whilst supplying specific loads.

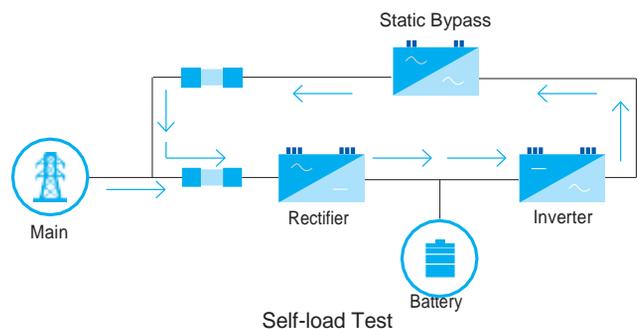

UPS



Isolated Transformer





Load



Intelligent Management

- Multi-functional touch screen with LED Indicators, ensure comprehensive and visualized information display.
- Large data storage capacity, events logs 10000pcs.
- Intelligent battery management which include 3 stage battery charging mode, Battery static and battery test function which prolong battery service life.
- Key components pre-alarm function.
- Smart programmable dry contact communication.
- Dedusting function which save the service time and keep system performance.
- Easy onsite firmware update.

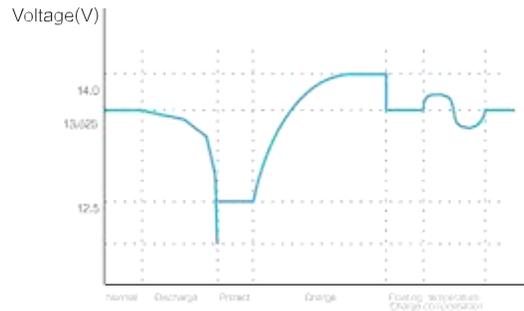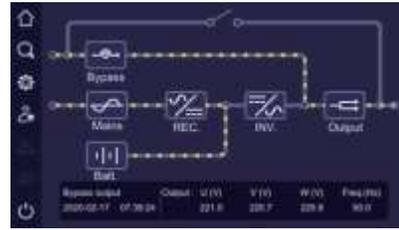

Intelligent battery management



Flexible Design

- Adjustable input and output phase 3:3/3:1/1:1 for 10-20KVA and 3:3/3:1 for 30-40KVA to meet multiple power distribution condition.
- Integrated autonomy with compact footprint and external battery slot for extend power outage.
- DC voltage settable $\pm 96 \sim \pm 240$ for 10KVA, $\pm 144 \sim \pm 240$ for 20~40KVA.
- Multi-language of Chinese, English, Italian, Polish, Russian, Spanish, Korean.
- Frequency converter function (60Hz/50Hz or 50Hz/60Hz).
- Common battery bank in 2 units parallel system
- Easy onsite parallel slot modification up to 4 units
- Wheel design easy for movement and relocation.



More Options

- Parallel kit
- SNMP slot
- Dust filter kit
- Expanded dry contact kit
- Intelligent Battery Monitoring System
- Protocol transfer kit
- LCD display
- Lithium battery
- Input/output isolation transformer
- Battery Charge Temperature Compensation



Parallel kit



SNMP Slot



Protocol transfer kit

LYONN ST5100-KS-MY

Technical Specification

Capacity	10KVA	15KVA	20KVA	30KVA	40KVA	
Input						
Phase	3:3/3:1/1:1			3:3/3:1		
Voltage (Vac)	80-280(L-N)/138-485 (L-L)			138-485 (L-L)		
Frequency (Hz)	40-70					
Power Factor	≥0.99					
THDi at full Linear load	<3%					
Dual Main Input	Yes					
Output						
AC/AC Efficiency (Max.)	96%					
Power Factor	1.0					
Voltage (Vac)	220/230/240±1%(L-N) 380/400/415±1%(L-L)					
Frequency (Hz)	50/60±0.1 (battery mode)					
THDv	THD <1% (linear load), THD <3% (nonlinear load)					
Crest Factor	3:1					
Overload	105% load for long run, 130% load for 10 mins, 155% load for 1 min, above 155% load for 200ms					
EPO	Remote and Local					
Cold Start	Yes					
Battery						
Voltage (Vdc)	±192(±96 ~±240 adjustable)	±192(±144 ~±240 adjustable)*				
Internal Battery	16~40*9AH/12V	24~40*9AH/12V	48~80*9AH/12V			
Charging Current (A)	1-10 settable			1-20 settable		
Other						
Communication Interface	RS485+EPO+Dry contact(1 input,5 output)(RS232+dry contact, SNMP are optional in slot)					
Display	4.3 Inch Touch Screen+ LED+ Physical buttons					
Alarm	Low battery, abnormal AC input, UPS failure, etc.					
Protection	Low battery, overload, short-circuit and over temperature, etc.					
Noise (dB)	<55					
Working Temperature (°C)	-5~40					
Relative Humidity	0 ~ 95%, no condensation					
Altitude(m)	2000, no derate					
Dimension (WxDxH)(mm)	250*755*880			300*785*1250		
Weight (kg)	with Battery	98(20x9AH)	127(32x9AH)	144(40*9AH)	240(64*9AH)	264(80*9AH)
	w/o Battery	53	53	53	85	85
	with TX	143	143	143	240	240